

DETAIL OF SEPTIC TANK & SOAKPIT
(NOT TO SCALE)





LOCATION PLAN



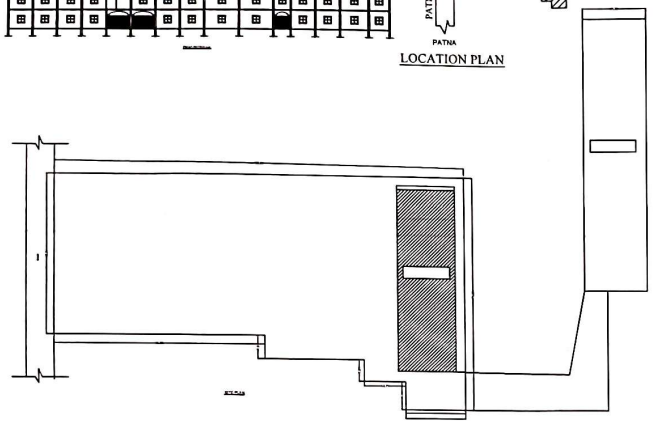





TYPICAL SECTION OF
ISOLATED FOOTING
(NOT TO SCALE)

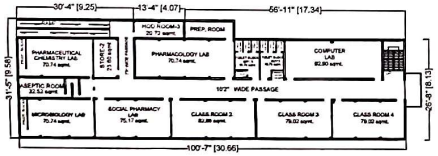

SECOND FLOOR PLAN

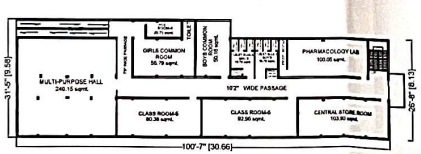

THIRD FLOOR PLAN

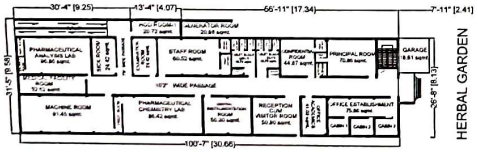

GROUND FLOOR PLAN

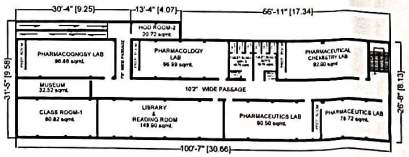

FIRST FLOOR PLAN

DASHRATH PRASAD RAMNANDAN PANDEY COLLEGE OF PHARMACY

KHATA NO.	03	49	63	30	25	09	23	55
PLOT NO.	316, 305, 241, 304	321	315, 325	322	306	324	243	317

VILLAGE:-ERKA,P.S-KUTUMBA,P.O-AMBA,
BLOCK:-KUTUMBA(AMBA)
DISTT:AURANGABAD(BIHAR),
PIN CODE NO. -824111

DIRECTED BY (RUN BY)

SATBAHINI PUBLIC CHAIRITABLE TRUST, GOBIND BHAWAN VEER KUNWAR SINGH PATH, NEW AREA, M.G ROAD, AURANGABAD, (BIHAR) PIN CODE NO. -824101

AREA- 2 ACRE 63 DECI.

D1

SCHEDULE OF DOORS & WINDOWS

TYPE	SIZE	DESCRIPTION
D1	3'-6"X7'-0"	FULLY.PANN ONE L.SHUTTER
D2	3'-0"X7'-0"	FULLY.PANN ONE L.SHUTTER
D3	2'-6"X7'-0"	FULLY.PANN ONE L.SHUTTER
W1	6'-0"X4'-0"	FULLY.PANN FOUR L.SHUTTER
W2	4'-0"X4'-0"	FULLY.PANN TWO L.SHUTTER
W3	3'-0"X4'-0"	FULLY.PANN TWO L.SHUTTER
V	2'-0"X2'-0"	VENTILATER
C.G.	6'-10"X7'-0"	COLLAPSIBLE DOOR

SPECIFICATION

1	10" DIA 12'-0" DEPTH R.C.C (1:2:4) PILE FOUDATION
2	10" X 1'-0" R.C.C (1:2:4) GRADE BEAM
3	FIRST CLASS B.W . IN C.M (1:6) IN PLINTH & (1:8) IN SUPER STUCTURE
4	3" R.C.C (1:2:4) PLINTH & 6" R.C.C (1:2:4) LINTER BAND
5	1" P.S MOSAIC FLOORING OVER 6" DRY RAMMED KHOA
6	10" X 10" R.C.C (1:2:4) COLUMN & 6" WAIST SLAB.
7	1" P.C.C OVER 41/2" R.C.C ROOF SLAB
8	1/2" THICK PLASTER IN C.M (1:6) WILL BE DONE
9	PROVINDING LOCAL / TEAR WOOD FOR CHOWKHAT & SHUTTER
10	ALL TYPES OF SANITARY WORKS WILL BE DONE

F.A.R AREA =0.52

TOTAL PLOT AREA = 10643.23 SQMT

GROUND FLOOR = 1140.57 SQMT

FIRST FLOOR = 1079.80 SQMT

SECOND FLOOR = 1090.46 SQMT

THIRD FLOOR = 1129.46 SQMT

TOTAL = 4440.29 SQMT.

रूबी देवी
मुखिया
ग्राम पंचायत अम्बा
कुटुम्बा (औरंगाबाद)

SIGNATURE OF AUTHORITY

Regd. Engineer
ER/27/2021
Patna Nagar Nigam

SIGNATURE OF ENGINEER

SECRETARY
D.P.R.P. College of Pharmacy
Erka Colony, Amba, Aurangabad (Bihar)

SIGNATURE OF APPLICANT